

AN OPTIMIZE CLUSTERING PROTOCOL USING GENETIC APPROACH

Salony Handa¹, Vishal Walia², Dr.Rahul Malhotra³

¹M.Tech Student- ECE, ²Associate Professor (Dean Academic) RIEIT, Ropar (India)

³Director, GTBKIET Malout (India)

ABSTRACT

The key principle of this paper is to evaluate the performance of the network based on performance metrics such as throughput optimization, end to end delay, packet delivery ratio using GA algorithm. In this research, objective and fitness function are applied in genetic algorithm to calculate the average energy of the arrangement and to make sure which block has lesser energy than average energy. Afterwards that block has been added in the result of the objective function and then the movement in the fitness function is checked for the improvements in the LEACH protocol. This whole simulation is taken place in the MATLAB environment.

Keywords: LEACH Protocol, Genetic Algorithm, Neural, Throughput, Optimization.

I. INTRODUCTION

Wireless sensor networks (WSNs), which consist of a number of small battery-powered devices, are frequently to obtain various sorts of useful data from surroundings [1-5]. These devices sense physical properties, such as sound, humidity, pressure, luminosity, temperature, or chemical concentration, and transmit the gathered data to a base station (BS) for further analysis and processing. WSNs have been effective deployed in tactical combat situations, habitat monitoring, home security, and so on [11, 12]. Since WSNs consist of many sensors with limited energy, an energy-efficient network protocol is an important consideration in WSN applications. Many routing protocols for WSNs have appeared in the literature. But none of any algorithm is providing good optimization of energy. So our work will use Genetic Algorithm (GA) for optimization process. Also in the simulation it will be shown that how our technique is performing better than other techniques [6].

The remaining paper is organized as Section II will describe basic LEACH protocol, then Section III will give review of genetic algorithm working, In section IV proposed work model will be shown, Then In section V genetic algorithm based pseudo code has been described, Section VI will contain simulation results. Finally Section VII will discuss conclusion and future scope.

II. LEACH PROTOCOL

LEACH stands for Low-Energy Adaptive Clustering Hierarchy [1, 13]. The LEACH Network is through up of nodes, some of which are called cluster-heads. The trade of the cluster-head is to get together data from their instantaneous nodes and exceed it on to the base position [4]. LEACH is vibrant since the job of cluster-head rotates. The LEACH network has two phases:

2.1 Set-Up Phase

Cluster-heads can be preferred stochastically (at random based) on this algorithm:

$$T(n) = P/1-P * (r \bmod p-1), \forall n \in G$$

$$T(n) = 0$$

Where n is a random number between 0 and 1. P is the cluster head odds. G is the set of node.

- If $n < T(n)$, then that node becomes a cluster head. The high energy cluster head place rotates between the assorted sensors in regulate to not to exhaust the string of a single sensor.
- Each node takes the judgment independent of the additional nodes to become cluster head. It is based on the proportion determined a priori and round digit.

2.2 Steady Phase

Nodes transmit information based on TDMA schedule. Later than information has been recognized cluster head implement signal processing /compression and send to base location. Later than a definite moment a novel turn begins [7]. Major power reduction is owing to combine lossy compression with the information direction-finding and deal among excellence of production and quantity of density ensuing in considerable decrease of overall power indulgence.

III. GENETIC ALGORITHM OPTIMIZATION IN WSN

A genetic algorithm is used to figure out true or rough solutions and explore the problems for optimization [3] and use methods motivated by evolutionary biology such as inheritance, mutation, selection, and crossover. Genetic algorithms are executed as a workstation recreation in which an inhabitant of indefinable representations of aspirant solutions to an optimization trouble for improved solutions represented in binary as strings of 0s and 1s, further encodings are also achievable. Genetic algorithm is defined as [8]:

- An illustration of the solution domain,
- A Fitness function to estimate the solution domain.

The fitness function is defined more by the genetic demonstration and measures the value of the result. The fitness of the solution is the sum of values of all items in the knapsack if the representation is suitable or 0. In many cases, it is difficult to explain the fitness expression. In these cases, interactive genetic algorithms are used. The choice is too analogous the continued existence of the fittest in the usual world. Individuals are selected for “breeding” (or cross-over) based upon their fitness values – the fitter the individual, the more likely that individual will be able to reproduce [9]. The cross-over obtained by combining the two solutions jointly to create two new individuals. By every generation, there is a small possibility for every entity to transform, results in the change in the entity in a few diminutive technique [10].

A Genetic Algorithm can be described as:

- I. Generate an empty population called new-pop.
- II. While new-pops is not occupied do the subsequent:
 - a) Select two individuals at arbitrary from pop to select the individuals.
 - b) Cross-over the two individuals to generate the two new individuals.
 - c) Let every individual in new pop contains arbitrary possibility to mutate.

d) Swap pop with new pop

IV. PSEUDO CODE LEACH-GA BASED

- BEGIN
- Specify number of nodes (n);
- Initialize
- if
- node s be a candidate CH
- else
- CCH{s}=FALSE; //node s not be a candidate CH
- end if
- end if
- SendToBS: All nodes send messages to BS;
- BS broadcasts a message back to all nodes;

SET-UP PHASE

- do { //repeat for r rounds
- CH{s}=TRUE; //node s be a CH
- Else
- CH{s}=FALSE; //node s not be a CH
- end if
- end if
- if (CH{s}=TRUE) then
- BC (ADV) ← broadcast an advertisement message;
- Cluster(c); //form a cluster c;
- end if


STEADY-STATE PHASE

- If (CH(s)=TRUE) then
- receive data from members;
- aggregate received data;
- transmit received data;
- else
- If (My Timeslot=TRUE) then
- transmit sensed data;
- else
- node i at a sleep state
- end if
- end if
- one round is completed

- end
- end

V. PROPOSED MODEL

The proposed methodology of the proposed work is described as follows in the flowchart.

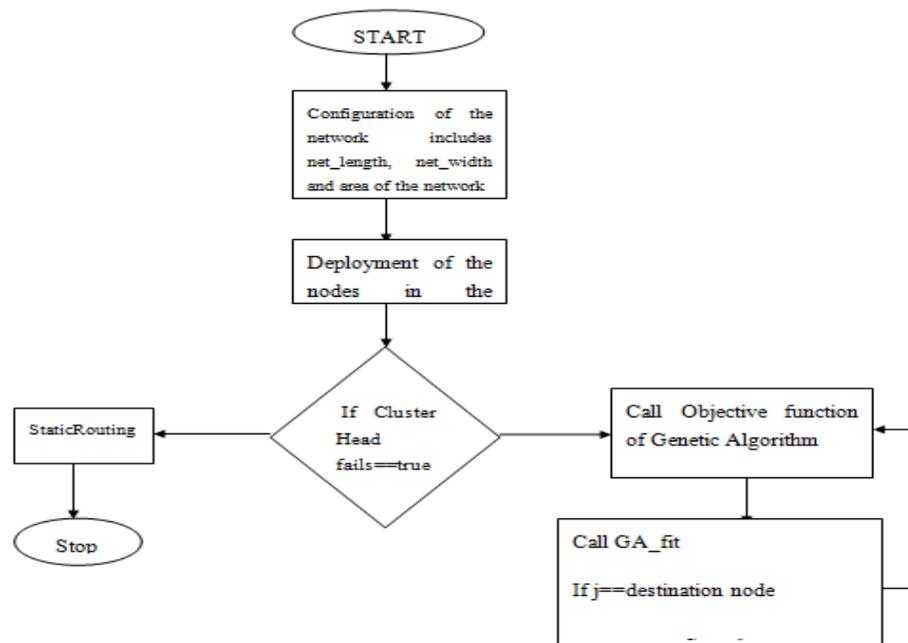

VI. RESULTS AND DISCUSSION

The performance simulation is taken place in MATLAB environment, in which initially No. of nodes that were taken are ----- and no.of heads are The performance evaluation will be done on the basis of following parameters.

- Throughput.
- End to end delay
- Packet delivery Ratio

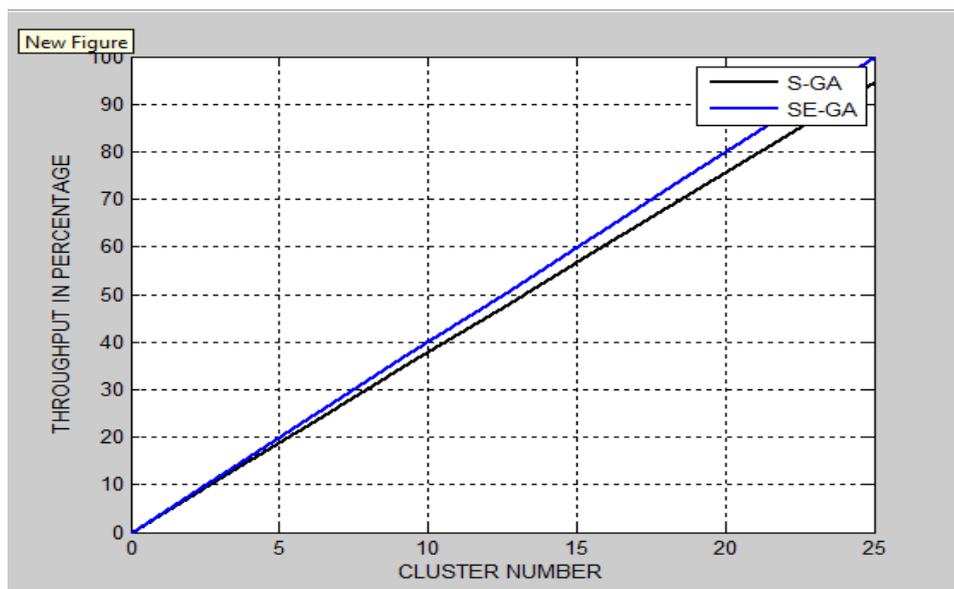


Fig 5.1: Throughput Performance

The figure 5.1 shows the throughput graph which shows the performance between speed with genetic algorithm and speed with energy of the cluster head using genetic algorithm.

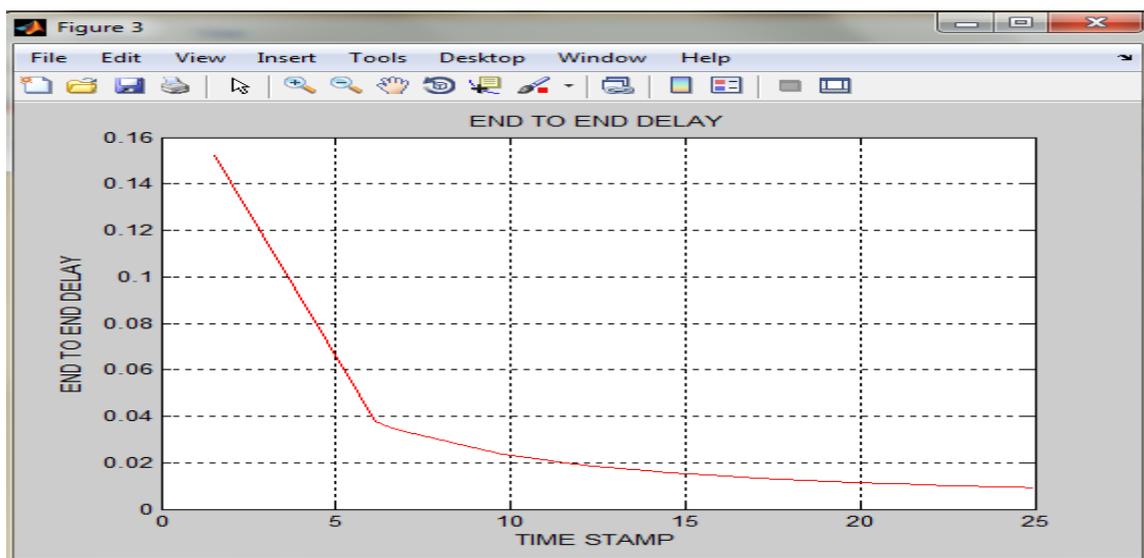


Fig 5.2: Graph of End to End Delay

The figure 5.2 shows the end to end delay which shows that at how much delay the packets are received by the destination to reduce the congestion in the network and having less energy consumption. This measure should be low as much as possible for the efficient network.

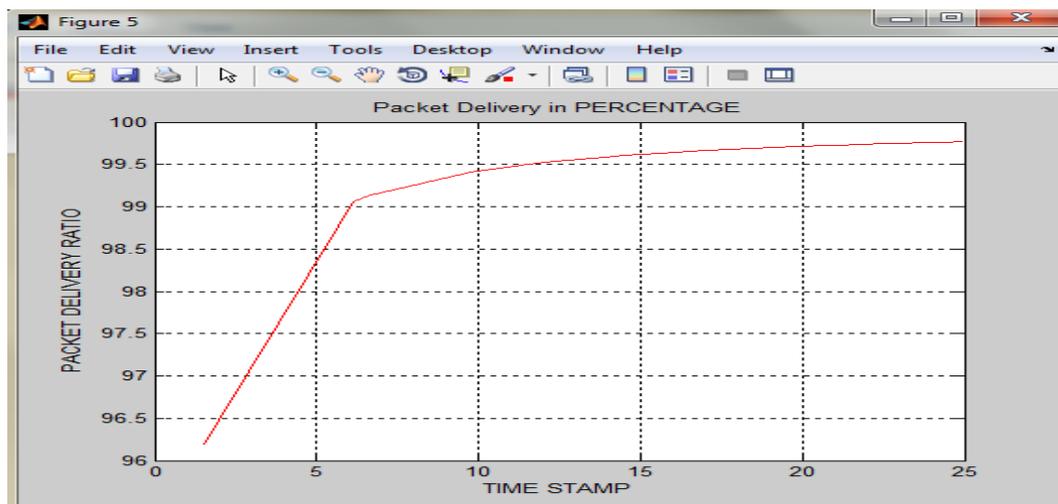


Fig 5.3: Packet Delivery Ratio

The figure 5.3 shows the packet delivery percentage which is an important parameter which shows that the packets are successfully sent from source to the destination and shows that 99.6 percent packets are delivered from source to the destination which increases the lifetime of the network and enhances the LEACH protocol.

VII. CONCLUSION AND FUTURE SCOPE

In this paper, an original Genetic Algorithm based Energy Efficient adaptive clustering hierarchy Protocol has been offered to powerfully maximize the lifetime and immovability period of wireless sensor networks. Genetic Algorithm energy efficient uses genetic algorithm to advance the network life span and stability period of the wireless sensor networks by finding the most favourable number of cluster heads and their locations based on minimizing the energy consumption of the sensor nodes. Mat lab simulation marks showed that the planned GENETIC ALGORITHM ENERGY EFFICIENT protocol is more energy efficient and more reliable in cluster process as compared to LEACH, LEACH-GA protocols in low or high dense networks and in homogeneous or heterogeneous networks. Also, GENETIC ALGORITHM ENERGY EFFICIENT protocol increases the dependability of clustering process because it expands the stability period and compresses the unsteadiness period.

In prospect, the cross layer optimization using uncertainty and routing strategy can be investigated moreover, the work can be complete by including multi-hop communication between cluster heads. Additionally, other knowledge techniques could be included to decide energy efficient clusters.

REFERENCES

- [1]. Ravneet Kaur, Deepika Sharma, "Comparative Analysis Of Leach And Its Descendant Protocols In Wireless Sensor Network," International Journal of P2P Network Trends and Technology- Volume3Issue1- 2013.
- [2]. Anjali Bharti, Kanika Sharma, "Enhancing the lifetime of LEACH Protocol using NNA for Wireless Sensor Network," International Journal of Computer Trends and Technology (IJCTT) - volume4Issue4 – April 2013.

- [3]. Jenn-Long Liu and China V. Ravishankar, "LEACH-GA: Genetic Algorithm-Based Energy-Efficient Adaptive Clustering Protocol for Wireless Sensor Networks," International Journal of Machine Learning and Computing, Vol.1, No. 1, April 2011.
- [4] C. Intanagonwiwat., R. Govindan, D. Estrin, J. Heidemann, and F. Silva, "Directed diffusion for wireless sensor networking," IEEE/ACM Transactions on Networking, vol. 11, issue 1, Feb. 2003, pp. 2-16.
- [5] T. Shepard, "A Channel Access Scheme for Large Dense Packet Radio Networks," ACM SIGCOMM Computer Communication Review, vol. 26, issue 4, Oct. 1996, pp. 219–230.
- [6] B. Krishnamachari, D. Estrin, and S. Wicker, "Modeling data-centric routing in wireless sensor networks," Wireless Communications, vol. 1, issue 4, , Oct. 2002, pp. 660-670.
- [7] W. B. Heinzelman, A. P. Chandrakasan, and H. Balakrishnan, "Energy-efficient communication protocol for wireless microsensor networks," in Proceedings of the 33rd Annual Hawaii International Conference on System Science, Maui, Hawaii, Jan. 2000, pp. 1-10.
- [8] W. B . Heinzelman, A. P. Chandrakasan, and H. Balakrishnan, "An application-specific protocol architecture for wireless microsensor networks," IEEE Transactions on Wireless Communications, vol. 1, issue 4, Oct. 2002, pp. 660-670.
- [9] P.T.V. Bhuvaneshwari and V. Vaidehi, "Enhancement techniques incorporated in LEACH- a survey," Indian Journal of Science and Technology, vol. 2, no. 5, May 2009, pp. 36-44.
- [10] S. Bandyopadhyay and E.J. Coyle, "An energy efficient hierarchical clustering algorithm for wireless sensor network," in INFOCOM 2003, vol. 3, San Francisco, CA, Mar. 2003, pp. 1713-1723.
- [11] K. Yang, Y. Wu, and H. Zhou, "Research of optimal energy consumption model in wireless sensor network," in 2010 2nd International Conference on Computer Engineering and Technology, Chengdu, China, Apr. 2010, pp. V7-421 - V7-424.
- [12] WONGSATHAN , "CLUSTER-BASED ROUTING USING BACTERIOLOGIC ALGORITHM IN WIRELESS SENSOR NETWORK", IEEE, PP.V 1-51 TO V1-9, 2012.
- [13] RAHMANIAN , "A NOVEL GENETIC ALGORITHM IN LEACH-C ROUTING PROTOCOL FOR SENSOR NETWORKS", IEEE, PP. 001096 – 001100, 2011.