



## AUTOMATIC LOAD SHARING OF TRANSFORMER USING MICRO-CONTROLLER

**Zaid Khan<sup>1</sup>, Sharik Mirza<sup>2</sup>, Shaibaz Shaikh<sup>3</sup>,  
Shubham Wakchaure<sup>4</sup>, Rajashree Kadam<sup>5</sup>**

<sup>1,2,3,4,5</sup>*Electrical Department, Guru Gobind Singh Polytechnic Nashik, Maharashtra, (India)*

### ABSTRACT

*The transformer is a static device, which converts power from one level to another level. The aim of the project is to protect the transformer under overload condition by load sharing. Due to overload on transformer, the efficiency drops and windings get overheated and may get burnt. Thus by sharing load on transformer, the transformer is protected. This will be done by connecting another transformer in parallel through a micro-controller. The microcontroller compares the load on the first transformer with a reference value. When the load exceeds the reference value, the second transformer will share the extra load. Therefore, the two transformer work efficiently and damage is prevented. In this project three modules are used to control the load currents. The first module is a sensing unit, which is used to sense the current of the load and the second module is a control unit. The last module is microcontroller unit and it will read the analogue signal and perform some calculation and finally gives control signal to a relay. A GSM modem is also used to inform the control station about switching. The advantages of the project are transformer protection, uninterrupted power supply, and short circuit protection. When designing low-voltage power system to the supply large load currents, paralleled lower-current modules are often preferred over a single, large power converter for several reasons. These include the efficiency of designing and manufacturing standard modular converters which can be combined in any number necessary to meet a given load requirement and the enhanced reliability gained through redundancy.*

**Keywords:** *Transformer, Microcontroller, GSM*

### I INTRODUCTION

Transformer is a static device which converts energy at one voltage level to another voltage level. It is an electrically isolated inductively coupled device which changes voltage level without change in frequency. Transformer transfers ac voltage from one electrical circuit to another by the principle of mutual induction. Distribution transformers are one of the most important equipment in power system and are also known as the heart of the power system. The reliable operation of a power system depends upon the effective functioning of the distribution transformer.



Therefore monitoring and controlling of key parameters like voltage and current are necessary for evaluating the performance of the distribution transformer. Thus it helps in avoiding or reducing the disruption due to the sudden unexpected failure. Transformers being one of the most significant equipment in the electric power system, needs protection as a part of the general system protection approach. Moreover the increasing population and their unavoidable demands have led to an increasing demand on electrical power. With this increased needs, the existing systems have become overloaded. The overloading at the consumer end appears at the transformer terminals which can affect its efficiency and protection systems. Due to overload on the transformer, the efficiency drops and the windings gets over heated and may get burnt. It takes a lot of time to repair and involves a lot of expenditure. Transformers are occasionally loaded beyond nameplate ratings because of existing possible contingencies on the transmission lines, any failure or fault in power systems, or economic considerations. One of the reported damage or tripping of the distribution transformer is due to thermal overload. To eliminate the damaging of transformers due to overloading from consumer end, it involves the control against over current tripping of distribution transformer. Rise in operating temperature of the transformer due to overloading has an influence on ageing of transformers. The accelerated aging is one of the main consequences of overloading power transformers. Thus load limitations must be implemented to operate the transformers within safe limits. Moreover on overloading the transformers voltage regulation may increase and power factor drops. The project is all about protecting the transformer under overload condition. This can be done by connecting another transformer in parallel through a microcontroller and a relay which shares the excess load of the first transformer. The transformers are switched alternatively to avoid thermal overloading. Therefore, two transformers work efficiently under overload condition and damage can be prevented. If there is a further increase in load beyond the capacity of two transformers there will be a priority based load shedding of consumers which will provide un-interrupted power supply for the hospitals, industries etc.

## II RELATED WORK


In the power system transformers may be loaded beyond their nameplate ratings due to a fault or some emergency conditions. This type of overloading can cause either short term failures or long term failures. Increase in hot spot temperature would also lead to the accelerated ageing of the transformers resulting in transformer overload. So in order to keep the body temperature of the transformer within its nameplate rating, the transformer must be loaded efficiently in a controlled manner. Our system aims at load sharing of transformers and priority based load shedding. The procedure of load sharing is summarized below.

1. Loads are supplied from a single transformer under normal condition and a standby transformer is connected in parallel through a circuit breaker.
2. A current transformer measures the load current continuously and feeds it to the controller by converting it to a corresponding D.C value in order to compare with the reference value set by the user.
3. Whenever the load current exceeds reference value, the controller sends a high signal to the relay which energizes the relay coil. The relay coil thus sends a tripping signal to the circuit breaker of the standby transformer.

4. Thus the load is shared by the transformers equally as the transformers are identical. The current transformer still measures the load current and compares it with the reference value.
5. Whenever the load current falls below reference value one transformer is shut down and this is done in an alternative manner to avoid thermal overloading.
6. If the load value increases further beyond the capacity of two transformers, load will be cut-off from the main supply based on the priority level set by the user. This is done to provide un-interrupted power supply to higher priority loads.
7. Each of the process is informed to the controller by a GSM and the load parameters are continuously displayed in the LCD.

This algorithm is followed whenever the transformer is working and the program is executed in a loop function so that the algorithm repeats itself.

### III BLOCK DIAGRAM

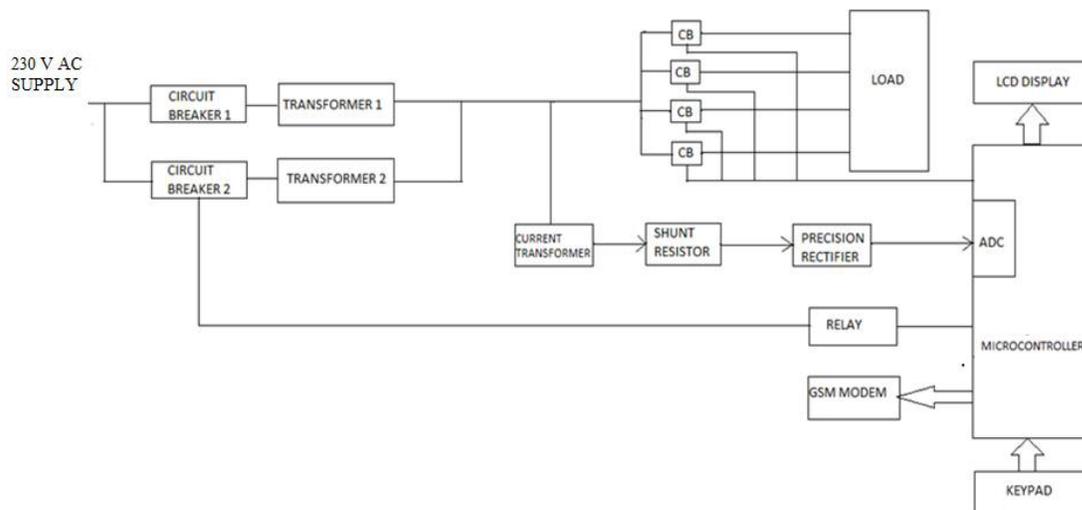

**Fig.01. Block Diagram**

#### Circuit breaker

A circuit breaker is used to isolate the faulty point of the power system in case of abnormal conditions such as faults. It is a protective device which energizes and de-energizes a circuit and provides over-current protection. Circuit breakers operate on receiving a signal from relay.

#### Transformers

A transformer is an electrical device that transfers electrical energy between two or more circuits through electromagnetic induction. Transformers convert AC voltage from one level to another level with a little loss of



power. A transformer operates on the principals of “electromagnetic induction”, in the form of mutual induction. The transformer used here is a step-down transformer so that it can be directly fed to the measuring devices by rectification.

## **Microcontroller**

The microcontroller is used to compare the load current with reference value. Atmega328 is the controller used for this purpose and it also provides a provision for GSM module and in built ADC.

## **Relay**

Relays are components which allow low power circuit to operate high current application circuits. It is an electricallyoperated switch and is used where it is necessary to control a circuit by a low-power signal with complete electrical isolation between control and controlled circuits, or where several circuits must be controlled by one signal. The relay used here is of electromagnetic type.

## **Current Transformer**

The Current Transformer is a type of “instrument transformer” that is designed to produce an alternating current in its secondary winding which is proportional to the current being measured in its primary. Current transformers reduce high voltage currents to a much lower value and provide a convenient way of safely monitoring the actual electrical current flowing in an AC transmission line using a standard ammeter. The principle of operation of a current transformer is same as that of an ordinary transformer.

## **GSM Modem**

A GSM modem is a specialized type of modem which accepts a SIM card, and operates over a subscription to a mobile operator, just like a mobile phone. Here the purpose of GSM modem is to send the monitoring parameters values and faults of transformer to authorized person’s number in control room.

It is a class of wireless modem devices that is designed for communication of a computer with the GSM and GPRS network. It requires a SIM card to send the message.

## **IV OPERATING PRINCIPLE**

In the proposed system, only one transformer is operating to feed the loads. A standby transformer is connected in parallel through a circuit breaker and relay. The current transformer continuously measures the load current and feeds it to the microcontroller ADC pins. The reference value or the maximum load limit is entered by the user and priority level of the load is also set by the user or concerned authority. As the load demand increase during peak hours, a single transformer would not be able feed all the load. During this condition, when the load demand exceeds the reference value, the microcontroller will give a control signal to energize the relay coil. Thus the standby transformer will be connected in parallel and will share the load equally since the transformers are of the same



ratings. Thus all the loads are fed efficiently providing un-interrupted power supply. The GSM modem will send a message to the control room about the load sharing and a display will be shown in the LCD display. When the load increases further to a value which is greater than the capacity of the two transformers, priority based load shedding will be implemented. The loads which have the lowest priority will be shut down by opening the respective circuit breakers. This message is also sent to the control room. When the load decreases, and comes to normal working condition, first transformer will be shut down in order to avoid thermal overloading. This is done because the first transformer operates for a longer time interval than standby transformer and its body temperature rises. By providing alternative switching, the transformers can be cooled by natural methods. Each time the GSM will send message about the active transformer thus making load sharing and load shedding efficient.

## V CONNECTIONS

The controller used is ATmega 328 which is 8 bit controller and has 20 I/O pins of which there are 14 digital I/O pins and 6 analog pins. The keypad is configured as rows and columns of which either row or column is set as input. Thus the controller reads the value by matrix arrangement. Crystal oscillator is connected to pin no. 9 and 10 of the controller which generates clock signals. Digital pins PD0 to PD7 are configured as output and all the output devices like LCD and GSM are interfaced to this port. The row pins of the keypad and the relay is connected to the port B while the column pins of keypad and CT is connected to port C of the controller. All the loads are connected to the port B through a relay which is supplied with a 12V supply. Relay contacts are shown named as RLY 1, RLY 2, and RLY 3. Of these two relay contacts corresponds to two transformers and the third relay corresponds to priority based load shedding. A crystal oscillator is used to generate clock signals to the controller. It is also possible to use internal oscillator of the controller unless the ADC pins are used. A CT is connected to ADC pin 5 of the controller and a variable resistor is used to vary the value of CT. A GSM is connected to digital pins 0 and 1 for communication purpose. In order to view the message displayed by GSM, a virtual terminal is used. A 4x3 keypad is used to set the maximum load limit and the LCD gives a visual indication of CT value and maximum load limit. For LCD display four bits of address lines are connected to the controller. RESET pin is connected to the power supply so that the controller works continuously. The controller can be reset by applying a logical low signal to RESET pin. Relays are connected with transistors which act as switches. Whenever a high signal is applied to the base of the transistor, the transistor act as a closed switch and energizes the coil of the relay which in turn latches the relay contactors. A freewheeling diode or a flywheel diode is connected across the relay coil to protect the collector terminal of transistor from the back emf of the relay coil.

## VI CONCLUSION

Transformers are one among the most generic and expensive piece of equipment of the transmission and distribution system. It is known as the heart of the power system. Due to its high cost, the protection and maintenance of the transformer is crucial. With increase in load demand day by day and with existing transformers the load demand is



to be satisfied and it may lead to increase in load of each transformer. One of the best solutions of overcoming this is by connecting transformers in parallel. In this project of Automatic Load Sharing of Transformers Using Microcontroller, a technology is implemented to share the load on the transformers. This provides un-interrupted power supply and avoids blackout in particular areas where there is varying loads. With the advancement of communication technology, now it is possible to receive overload condition of transformer through GSM to the control room. During overload condition exceeding specified limits information is immediately communicated through GSM technology to the concerned authority for possible remedial actions. Hence the transformer is protected from the overload condition and uninterrupted power supply is available to the consumers.

## REFERENCES

- [1] Akhil Krishnan V , Arun P S, D Yathishan, Jomice Thomas, DK Narayanan, “Automatic Load Sharing of Transformers using Microcontroller”, International Journal of Innovative Research in Science, Engineering and Technology
- [2] Narute Nitin Hanumant, Jadhav Sanjay Balbhim, Garad Yogesh Dattatray and Shinde Krishna Narayan, Microcontroller Based Automatic Load Sharing Of Transformer Department of Electrical Engineering, SVERI’s College of Engineering (Poly.), Pandharpur Third Year Diploma Students
- [3] S.R.Balan, P.Sivanesan, R.Ramprakash, B.Ananthakannan and K.Mithin Subash, “ GSM Based Automatic Substation Load Shedding and Sharing Using Programmable Switching Control”, Journal of Selected Areas in Microelectronics, Volume 6, Issue 2, pp. 59-61, 2014.
- [4] Ashish R. Ambalkar, Nitesh M. Bhoyar, Vivek V. Badarkhe and Vivek B. Bathe, “Automatic Load Sharing of Transformers”, International Journal for Scientific Research & Development, Volume 2, Issue 12, pp. 739-741, 2015.